


# ProDAQ LXI Data Acquisition Systems

## ProDAQ 8037 LXI Trigger Bus Terminator

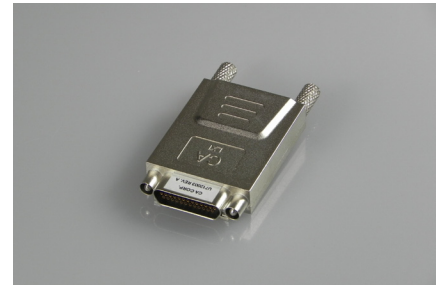

### OVERVIEW

The ProDAQ 8037 LXI trigger bus terminator connects to the ProDAQ 6100 LXI function card carrier or the 3030 PCI Express VXIbus slot-0 interface and to any LXI trigger bus wiring or daisy-chain configuration. The die-cast connector ensures a stable connection and prevents accidental disconnects.

**LXI**

### Features & Benefits

- ▶ **Terminator for** ProDAQ 6100 and ProDAQ 3030
- ▶ Improved **signal quality**
- ▶ **Support for links** up to 7m (22.97 ft.)

For more information,  
visit [www.bustec.com](http://www.bustec.com).

Learn more about the  
**ProDAQ 8037** on our website  
by scanning the code below.





## SPECIFICATIONS

### PHYSICAL CHARACTERISTICS

Compatibility	LXI Class A
Length	Up to 7m (22.97 ft.)
Connectors	Compatible with LXI trigger cabling standard

### ENVIRONMENTAL

Temperature	0°C to +70°C (operational) -40°C to +70°C (storage only)
Humidity	10% - 90% (non-condensing)

### WARRANTY PERIOD

12 months (extended periods available at additional cost)

### Ordering Information

- ▶ **8037-AA** LXI trigger bus terminator

#### Length

(Custom length available)

- ▶ **8037-AA**, 1m

#### Related Products

- ▶ **6100-xx** LXI function card carrier
- ▶ **3030-Ax** PCI Express x4 VXIbus slot-0 interface

### Contact Bustec

#### ▶ Europe

Bustec Ltd.  
Bustec House  
Shannon, Co. Clare  
Ireland

T +353 61 707 100

F +353 61 707 106

E sales@bustec.com

#### ▶ North America

Bustec, Inc.  
1507 East Valley Parkway  
Suite 3-412  
Escondido, CA 92027  
U.S.A.

T 909. 797.0484

F 760. 751.1284

E sales@bustec.com